
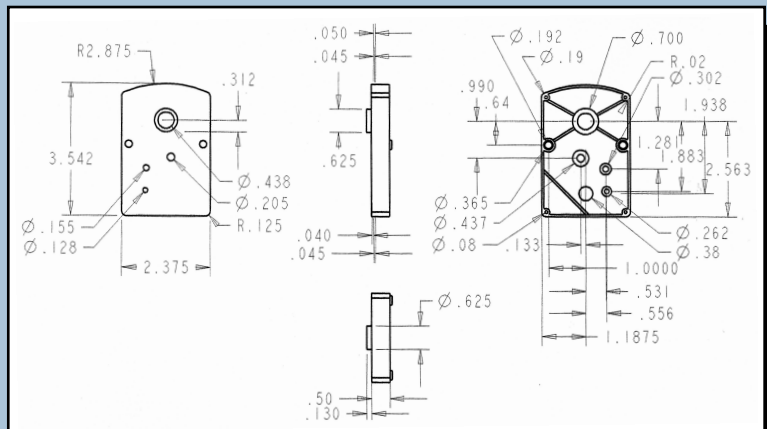

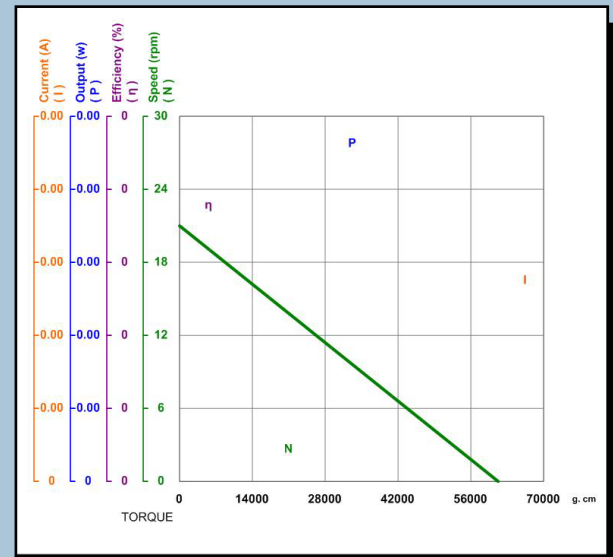


Technical Specifications

<u>E.E. URD</u>	<u>12V 1:420</u>	<u>24V 1:420</u>
Voltage:	12 VDC	24 VDC
Rotation Direction:	CW	CW
Rated Load:	8000 g. cm	8000 g. cm
At No Load:		
Speed:	21 rpm	21 rpm
Current:	0.150 A	0.070 A
At Stall (Extrapolated):		
Toque:	62000 g. cm	64000 g. cm
Current:	2.500 A	1.250 A
At Maximum Efficiency:		
Efficiency:	23.49%	24.58%
Torque:	12198.8 g. cm	12247.0 g. cm
Speed:	17 rpm	17 rpm
Current:	0.612 A	0.296 A
Output:	1.73 W	1.75 W
At Maximum Power:		
Efficiency:	17.18%	17.80%
Torque:	31000 g. cm	32000 g. cm
Speed:	11 rpm	11 rpm
Current:	1.325 A	0.660 A
Output:	2.73 W	2.82 W

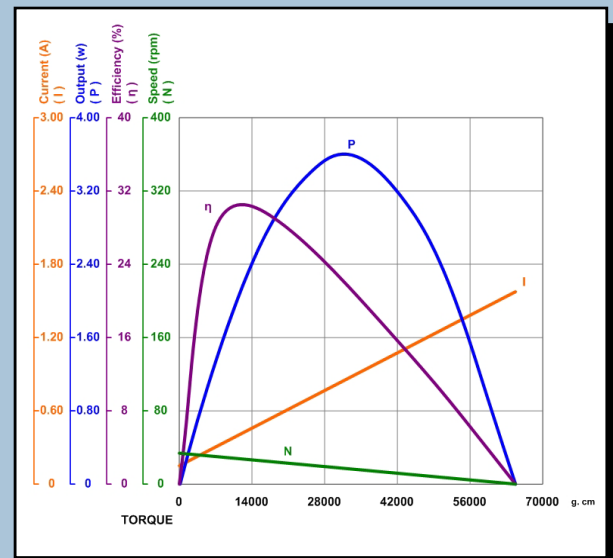

E.E. URD

Design and Manufacturing

P.O. Box 6006
Laguna Niguel, CA 92607
info@eeurd.com

Laguna Niguel Office	Murrieta Office
P 949.831.0111	P 951.304.3849
F 949.831.6371	F 951.304.3857

www.eeurd.com